



Lustrolite®



Versatile High Gloss Polymer Panels

www.nslites.com


DISTRIBUTED BY





Create inspiring spaces with awa for use in a variety of decorative applications

Lustrolite's ultra high gloss, ripple free surface combined with brilliant depth and outstanding scratch resistance make it ideal for a multitude of applications

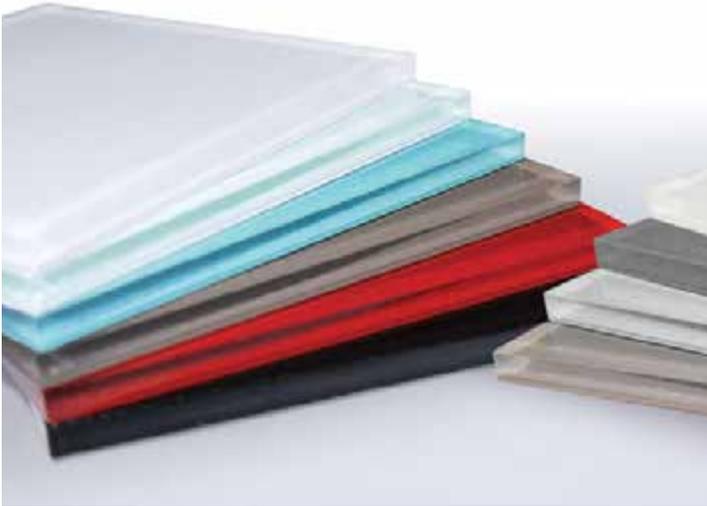

Bathroom and Shower Panels

Combining its beautiful ripple free, highly scratch resistant surface with magnificent panel depth and light weight, Lustrolite® is a vastly superior alternative to tiles, glass and other decorative panels.

Lustrolite's impressive list of features includes:

- Brilliant mirror reflection and high gloss finish
- Significantly less expensive than equivalent glass products
- Effortless to clean due to its advanced scratch and chemical resistant hard coating
- Can be cut, drilled, filed and planed with standard woodworking tools (e.g. circular saws, routers, jigsaws, files and planers)
- Half the weight of equivalent glass panels yet up to 25 times stronger resulting in easier handling and faster installation
- Fantastic for hygiene as Lustrolite's smooth surface does not harbor mold or bacteria



Catering Areas

rd winning Lustrolite®



Backsplash



Store Fixtures



Reception Areas



Decorative Screens

 **Lustrolite®**

Lustrolite's clean lines, highly reflective surface and intense depth of color complement modern architecture and brighten and enhance virtually any environment



Furniture

Stocked Panel Sizes

Lustrolite® is 5/32" (4mm) thick, and is available in a range of panel sizes.

60" x 114"
Arctic and
Clear Only

60" x 96"

48" x 96"

39" x 96"

Custom sizes and colors may be available subject to MOQ and other conditions.

Durability

Lustrolite® is extremely resilient against scratching, chipping, cracking, warping, staining, peeling and flaking.

Workability and Installation

Lustrolite® can easily be worked in the shop or on site due to its lightweight and as it can be cut, sawn, drilled and finished using standard woodworking tools.

Compared to tiles and glass, installation is a breeze requiring only double sided tape and neutral cure silicone.

Opacity and Lighting

Lustrolite® is opaque, however it can be effectively side and top lit.

Special lighting accents can also be easily created by routing the color layer and back lighting the panel.

Scratch and Chemical Resistance

A high performance hard coat on the panel's face side provides exceptional scratch and chemical resistance whilst promoting effortless cleaning.

Lustrolite® is compatible with a range of chemicals and cleaners including acetic acid, mineral spirits, kerosene, ammonia based cleaners, citrus cleaners, bleach, isopropyl alcohol and TSP.

Environment Friendly

All color pigments used in the manufacture of Lustrolite® do not contain heavy metals such as lead.

No Volatile Organic Compounds (VOCs) are produced or released in manufacture or use.

Color Robustness

The permanently color fused layer on the reverse side of Lustrolite® is guaranteed not to delaminate or peel and is vastly more resilient to scratching compared to back painted glass.

Hygiene

Panel surfaces do not promote or harbor mold or bacteria growth or transmission.

Cleaning and Maintenance

Panel surfaces can easily be kept clean using warm soapy water and a dampened chamois or microfiber cloth. Harsh and volatile chemicals and cleaners are not required.

Color Range

Due to the nature of the printing process, the colors and images depicted throughout this brochure may vary compared to the actual finished products' colors. Images and colors are to be used as a guide only.

Clear

Blue Atoll

Carbon

Arctic

Safari

Titan

Ivory

Mocha

Calacatta Marble

Titanium

Glacier

Rouge

Lavato Oak

EGR Polymer Panel Technical Data Sheet - Lustrolite®

General Properties

Properties	Test Method	Lustrolite
Thickness		5/32" (4mm)
Specific gravity	ASTM D-792	1.19
Water absorption	ASTM D-570	< 0.5%
Gloss*	AS/NZS 1580.602	> 90%
Tensile strength	ASTM D-638	70MPa
Elongation at Yield	ASTM D-638	4%
Tensile modulus	ASTM D-638	3,000 MPa
Flexural strength	ASTM D-790	100 MPa
Flexural modulus	ASTM D-790	3,000 MPa
Izod impact strength, Milled Notch	ASTM D-256	15J/m
Pencil Hardness*	ASTM D-3363	> 6H
Erichsen Hardness*	ISO 4586-2 (DIN EN 438-2)	≥ 1.1N
Abrasion	ASTM D-1044	< 10 % Gloss
HDT 264 Psi, 1.82MPa	ASTM D-648	203°F (96°C)
CTE, -22°F to 86°F (-30°C to 30°C)	ASTM D-696	0.65mm/36"/18°F (0.7mm/1,000mm/10°C)
Vicat softening point		219°F (104°C)
Continuous service temperature		170°F (77°C)
Max temperature, short term		202°F (95°C)
Degradation temperature		> 530°F (> 275°C)

* Internally tested by EGR

Chemical Resistance

Lustrolite is chemically resistant to the following substances:

- Kerosene
- Bleach
- Mineral Spirits
- 10% Citric Acid
- Lemon Juice
- Vinegar
- Coffee
- Liquid Soap
- Glass Cleaner

Lustrolite should not be exposed the following substances:

- Acetone
- Methylated Spirit
- Abrasive Cleaners
- Aggressive Solvents such as Toluene.

Fire Properties

Most building codes recognize that most thermoplastics do not meet all the ASTM E 84 testing requirements for Interior Finishes as it's a ceiling based test and therefore unsuitable for thermoplastics that may melt or drip. An alternative testing criteria has been established in the code for Light Transmitting Plastics. Lustrolite complies with the International Building Code for Light Transmitting Plastics (being ASTM D-2943 and ASTM D-635). However Lustrolite is a combustible thermoplastic so appropriate fire precautions should always be observed.

Properties	Test Method (DOT)	Requirement	Result
Extent of burn - Light Transmitting Plastics (IBC2606)	ASTM D-635 - (2016)	Class CC2 = < 2.5"/min (< 63.5mm/min)	< 3/4"/min (< 18.5mm/min)
Smoke density Rating - Light Transmitting Plastics (IBC2606)	ASTM D-2843 (2016)	Must be lower than 75%	3.7%
Smoke density - Light Transmitting Plastics (IBC2606)	ASTM D-2843 (2016)	Must be lower than 75%	Max smoke density 12%
Ignition Temperature - Light Transmitting Plastic	ASTM D-1929 (2016)		628°F (331°C)
Spontaneous Ignition Temperature - Light Transmitting Plastic (IBC2606)	ASTM D-1929 (2016)	Must be greater than 650°F (343°C)	734°F (390°C)
Flame spread Index	ASTME 84-08a (2016)	Class 1 = 0-25, Class 2 = 26-75 Class 3 = 76-200	93
Smoke developed Index	ASTME 84-08a (2016)	Class 1,2,3 = < 450	> 450
Flame spread	UL94 Horizontal Burning test 94HB (2008)	Burn rate < 1 5/16"/min (< 40mm/min)	Average 1 5/16"/min (23mm/min)

References to the product's performance under the testing standards above are informational only. Please consult with qualified building professionals to ensure that the material is suitable and compliant for the chosen application as per local building code requirements.

Date of issue: May 1, 2018

EGR - The Trusted Australian Manufacturer For Over 45 Years



With more than 45 years manufacturing experience, EGR exports its products to over 40 countries around the world. By employing world class systems and using the latest technology, EGR manufactures and supplies quality products to over 10,000 distribution points globally.



EGR Decor is a global supplier of high quality, decorative vertical surfaces for the building industry.

For additional information, please contact your North Star representative.

Distributed by



23 Empire Drive St. Paul, MN 55103
800.383.9784 www.nssurfaces.com



EGR Lustrolite panels are designed and manufactured as a decorative finish for indoor use only. Lustrolite is designed to be attached on to a solid wall or structure in accordance with local building regulations and the Lustrolite Installation & Specifications Guide. Lustrolite is for decorative purposes only and cannot be used as structural building elements. Images and colors should be used as a guide only.
© 2018 / Patent Pending. Oakmoore Pty. Ltd. Trading as EGR. ABN: 13 056 159 570 *10 Year Limited Warranty. The Lustrolite Warranty covers faulty materials for a period of 10 years from the date of sale by EGR subject to the terms, conditions and exclusions contained within the entire warranty document. 172-181017 - V18 081018